


Ballast Compatible LED T8 Tube

- High efficiency (120 Lm/W) retrofit for T8 lamps in residential, commercial and industrial applications
- Wide compatibility with approved electronic Instant / Rapid / Programmed / Dimmable / Emergency ballasts eliminating ballast removal and rewiring of fixtures
- Economical price for faster ROI in any scale of retrofit project type
- Patent licensed program protected
- 10 Year limited warranty

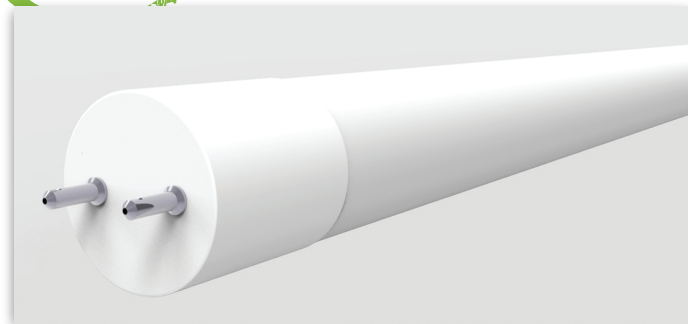

Technical Specifications

Model:	T8 - 13	T8 - 13	T8 - 15	T8 - 18
Wattage per Ballast Factor - Low - 0.78 / Normal - 0.88 / High - 1.1	12.8W / 14.5W / 18.6W	12.8W / 14.5W / 18.6W	15.2 / 16.5 / 23.2	16.5 / 18.5 / 25.8
Lumens per Ballast Factor:	1300 / 1680 / 2150	1350 / 1720 / 2200	1650 / 1860 / 2750	1950 / 2250 / 2820
Ballast Compatibility:	Manufacturer Approved Electronic Rapid Start / Instant Start / Programmed Start / Dimming / Emergency			
Lamp Base:	G13 Bi-pin			
Chromaticity Data:	CRI - >82 / R9 - 8 / Duv - .0008			
CCT:	4000K / 5000K			
L70 Lifespan:	50,000hrs.			
Beam Angle:	160°			
Length / Diameter:	23.62in - 600mm / 1.02in - 26mm	47.24in - 1200mm / 1.02in - 26mm		
Weight:	6.5oz. / 185g	13oz. / 370g		
Operation Temperature:	-10°C to +40 °C Ambient			
Ingress Protection:	IP50			
Limited Warranty:	10 Years			
Notes:	CCT ±175K @ Ta=25°C / CRI ±5% All values are nominal.			

PART NUMBER SPECIFICATION

Model	Length / Series	Power Option	CCT Option
	T8 - M3 (2ft)	13 (Nominal Wattage)	40 (4000K) 50 (5000K)
	T8 - M3 (4ft)	13 (Nominal Wattage) 15 (Nominal Wattage) 18 (Nominal Wattage)	

