


Tec Energía Post Top LED



Total Power Consumption	20W	30W	40W	50W	60W	70W	80W
Input Voltage	AC 95-305V	AC 95-305V	AC 95-305V	AC 95-305V	AC 95-305V	AC 95-305V	AC 95-305V
Frequency Range	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz	50-60 Hz
Power Factor	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95	>0.95
LED Color	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW	WW/NW/CW
CRI	<70	<70	<70	<70	<70	<70	<70
LED Luminous Flux	2600	3900	5200	6500	7800	9100	10400
Efficacy	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W	130lm/W
Working Temperature	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C	-40°C ~ 50°C
Working Ambient Humidity	10~95%	10~95%	10~95%	10~95%	10~95%	10~95%	10~95%
Projected Life Span	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours	50,000 Hours

- Die-cast Aluminum with Anti-corrosion treatment
- Patented Lens with Low Light Loss
- Stainless Steel Hardware
- IP65 Rating, IK10 Impact Rating
- High Efficacy CREE COB Diode, Meanwell Driver up to 120W
- 5 Year Warranty
- 50% - 70% energy savings when compared to Metal Halide or Vapor Sodium lamps

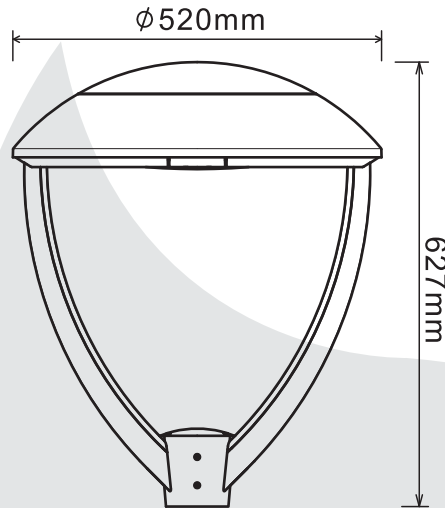