



Linear LED Ceiling Fixture



Art of Simplicity



Certifications

UL, DLC listed

Appearance

Beautiful rectangular or customized design is available.

Mounting

It can be cable-suspended or surface-mounted.
And it can be chain-link suspension

Efficient

High efficiency, environmentally friendly, easy to maintain



Hospital



Factory



School



Office




Supermarket

Features

- An energy-efficient, low maintenance alternative to traditional fluorescent lamps.
- LED light engine consists of a precision aluminum heat sink and aluminum printed circuit board, which is good for heat dissipation and low luminous decay.

Product Dimensions

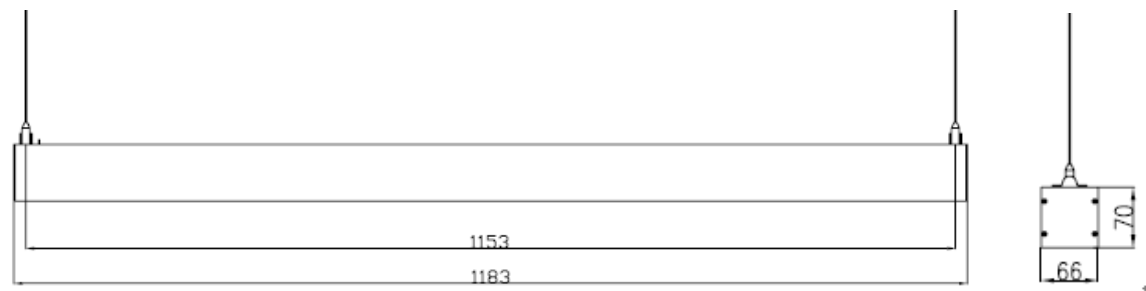

Product Length	L(mm)	D(mm)	H(mm)
4FT	1183	66	70

Product Specification Electrical Characteristics

• Humidity Operating 10%-80% Storage 10%-80%	• Temperature Operating -20~+40 °C Storage -20~+40 °C	Input Voltage: AC100-277V 50/60Hz PF :> 0.9, THD<20% Power efficiency: 87%
---	--	--

Item	Wattage	LED Q'TY	CRI	CCT	Luminous Flux	Beam Angle	Cover	Dimmable
TEC-GABINETE - 30W	30W	108pcs 2835LEDs	>80	4000K	3450LM ± 10%	105°	Frosted	Optional
				5000K	3450LM ± 10%			
TEC-GABINETE - 40W	40W	144pcs 2835LEDs	>80	4000K	4600LM ± 10%	105°	Frosted	Optional
				5000K	4600LM ± 10%			